

CAMFLEX C-65 & C-62

CamFlex is an Epoxidised Soyabean Oil - Liquid Stabilizer made from the best of feedstock available.

Properties:

Item	Standard Value(s)	
	CamFlex C-65	CamFlex C-62
Appearance	Pale Yellow Liquid	Pale Yellow Liquid
Specific gravity	0.97 - 0.99	0.97 - 0.99
Volatile Loss (@ 160 °C) <i>(for 120 minutes)</i>	0.4% Max	0.3% Max
Oxirane Oxygen	6.5 ± 0.2	6.2 ± 0.2
Acid Value KOH mg/g	1.0 Max	1.0 Max
Iodine value %	3.0 Max	6.0 Max
Moisture Content %	0.2 Max	0.2 Max

Recommended dosage:

Plasticized PVC – Recommended concentration is 2-5 PHR

Rigid PVC – Recommended concentration is 1-3 PHR

Packing: 200 KGs Drums or 30 KGs carboys or according to customer's requirements

Storage: Store in cool and dry place, 15 - 30 °C recommended, upside, keep lid tightly closed.

Shelf Life: 12 months



CAMEX HOUSE, 2nd Floor, Stadium-Commerce Road,
Navrangpura, AHMEDABAD-380009. (INDIA)




Phone : 26462123 | 26462261 | 8980548181 | 8980548282
Web : www.camexltd.com | E-Mail : info@camexltd.com

A Govt. Recognised Export House



CamFlex C-65 & C-62

Technical Data Sheet

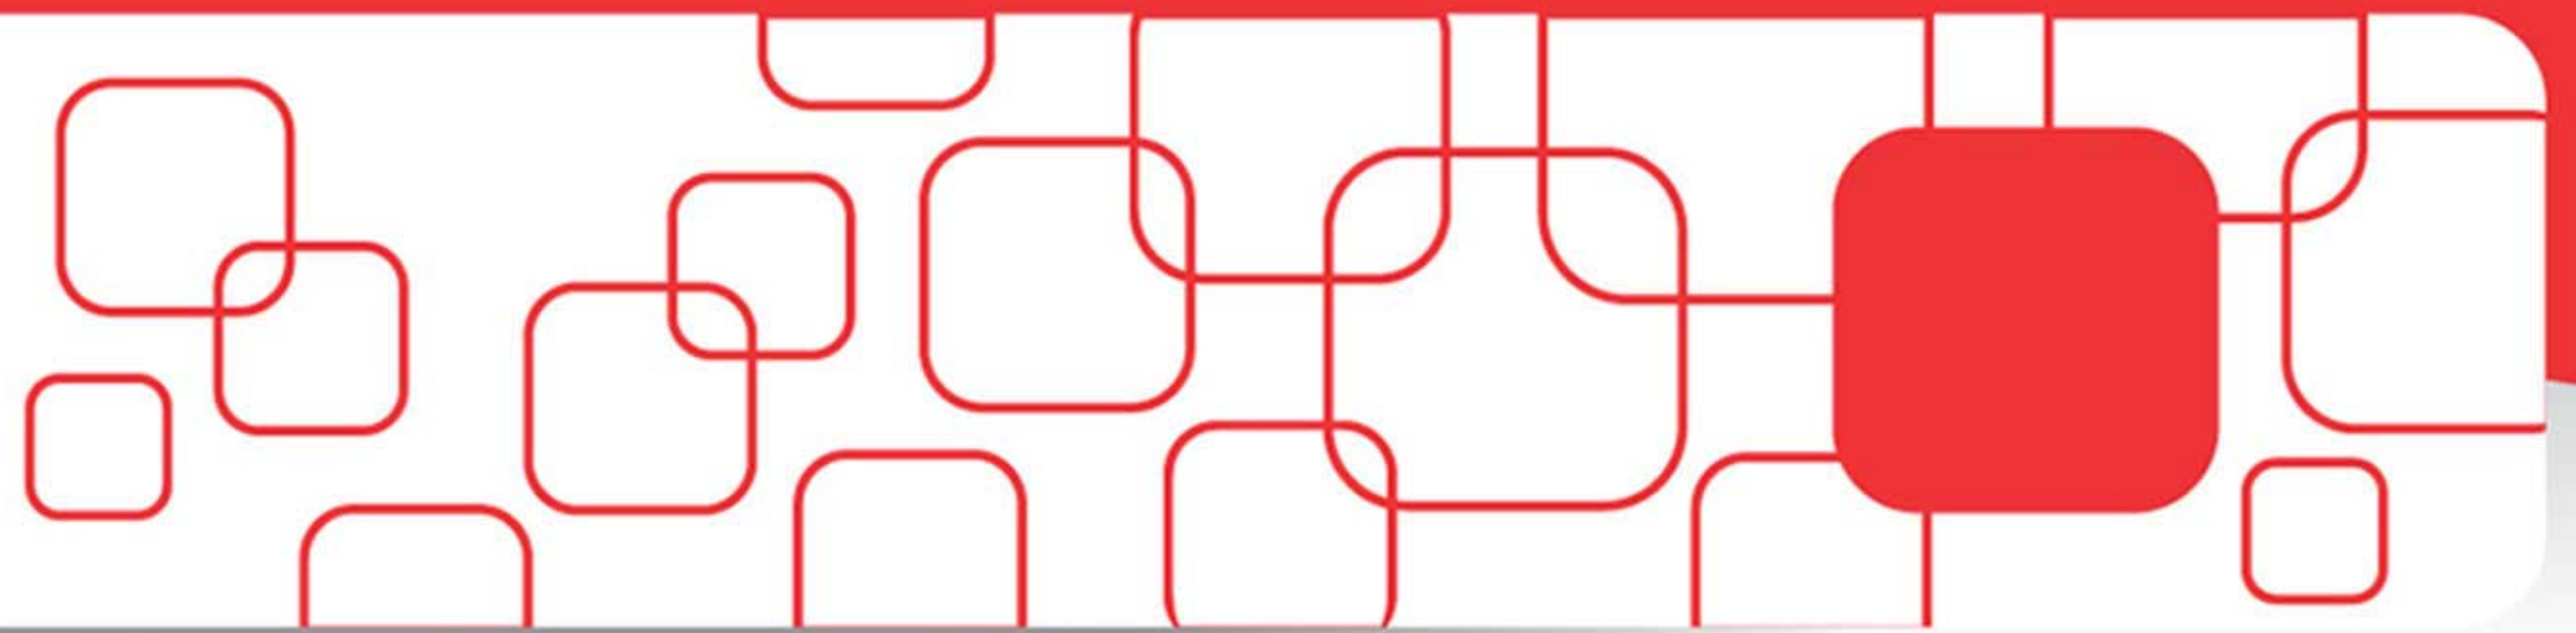

Application:

- PVC Pressure Pipes
- PVC Flexible Suction Pipes
- PVC Garden Hose Pipes
- PVC Films and Sheets
- PVC Artificial Leather Cloth
- PVC Fittings
- PVC Casing & Capping
- PVC Trunking
- PVC Profiles
- PVC Cables Compounds
- Recycled PVC processing



Camex
LIMITED

A Govt. Recognised Export House

CAMEX HOUSE, 2nd Floor, Stadium-Commerce Road,
Navrangpura, AHMEDABAD-380009. (INDIA)



Phone : 26462123 | 26462261 | 8980548181 | 8980548282
Web : www.camexltd.com | E-Mail : info@camexltd.com