

CWAX 550

Fully Refined Paraffin Wax, is widely used because of its excellent property of cold / heat / chemical and abrasion resistance.

Properties:


| Item | Standard Value(s) | Test Method |
|-------------------------------|-------------------|-------------|
| Physical Form | Prill / Granular | Visual |
| Colour | White | ASTM D1500 |
| Melting Point, ⁰ C | 62±2 | ASTM D87-09 |
| Oil Content | 0.3 - 0.5% | ASTM D721 |
| Specific Gravity @ 15 °C | 0.8 gr/cm3 | ASTM D2726 |
| Flash Point | 300 °C | ASTM D93-13 |
| Organic Acidity | NIL | |
| Inorganic Acidity | NIL | - |

Packing: 25 KGs HDPE bag with Inner lining or according to customer's requirements

Storage: Keep in dry, cool & shaded place with original packing, avoid moisture, store at room temperature.





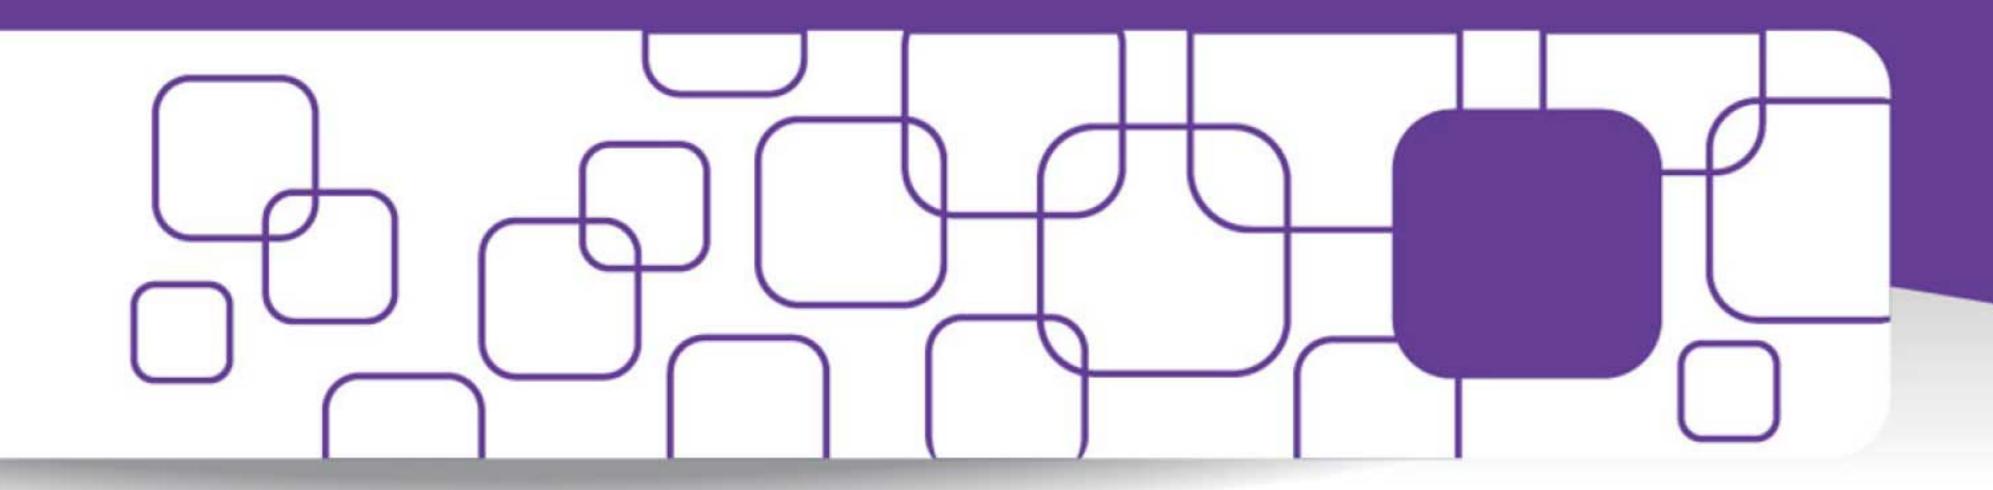

Application:

- 1. Fully Refined Paraffin Wax is used for Candles, torches, tapers, matches, floor polishes
- 2. Fully Refined Paraffin Wax is also used for Car polishes, corrosion protectors
- 3. Paraffin Wax is also consumed by Electrical industries, cable filling compounds
- 4. Paraffin Waxes are used in Tires and rubber products, as ozone protection
- 5. Fully Refined Paraffin Wax is used in Paper production

A Govt. Recognised Export House

6. Fully Refined Paraffin Wax is also used in production of Carbon paper, crayons and pencils.