

## CAMFLEX C-65 & C-62

CamFlex is an Epoxidised Soyabean Oil - Liquid Stabilizer made from the best of feedstock available.

### Properties:

Item	Standard Value(s)	
	CamFlex C-65	CamFlex C-62
Appearance	Pale Yellow Liquid	Pale Yellow Liquid
Specific gravity	0.97 - 0.99	0.97 - 0.99
Volatile Loss (@ 160 °C) <i>(for 120 minutes)</i>	0.4% Max	0.3% Max
Oxirane Oxygen	6.5 ± 0.2	6.2 ± 0.2
Acid Value KOH mg/g	1.0 Max	1.0 Max
Iodine value %	3.0 Max	6.0 Max
Moisture Content %	0.2 Max	0.2 Max

### Recommended dosage:

Plasticized PVC – Recommended concentration is 2-5 PHR

Rigid PVC – Recommended concentration is 1-3 PHR

**Packing:** 200 KGs Drums or 30 KGs carboys or according to customer's requirements

**Storage:** Store in cool and dry place, 15 - 30 °C recommended, upside, keep lid tightly closed.

Shelf Life: 12 months



### Government Recognised Export House


Camex House, 2<sup>nd</sup> Floor, Stadium commerce Road, Navrangpura Ahmedbad-380009  
Phone : 26462123 / 26462261 / 8980548181 / 8980548282  
Email info@camexltd.com | Web :- www.camex ltd.com | CIN : L17100GJ1989PLC013041





## CamFlex C-65 & C-62

Technical Data Sheet

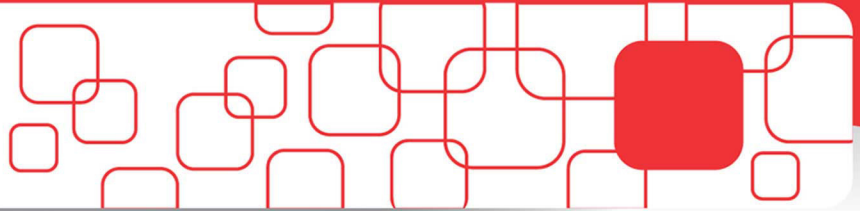

### Application:

- PVC Pressure Pipes
- PVC Flexible Suction Pipes
- PVC Garden Hose Pipes
- PVC Films and Sheets
- PVC Artificial Leather Cloth
- PVC Fittings
- PVC Casing & Capping
- PVC Trunking
- PVC Profiles
- PVC Cables Compounds
- Recycled PVC processing



#### Government Recognised Export House

Camex House, 2<sup>nd</sup> Floor, Stadium commerce Road, Navrangpura Ahmedbad-380009  
Phone : 26462123 / 26462261 / 8980548181 / 8980548282  
Email info@camexltd.com | Web :- www.camex ltd.com | CIN : L17100GJ1989PLC013041

